


BH-HTK

热缩电缆终端头1-36KV

特点及用途：

BH-HTK 热缩缩电缆终端可用于室内和室外的应用单芯和三芯电缆 1kV 直到 36kV 的终端安装。热缩电缆电缆终端套件包括所有必要的组件用于安装。

- 安装简单快捷，不需要额外的工具；
- 紧密封，高回弹即使经过长年老化和暴露；

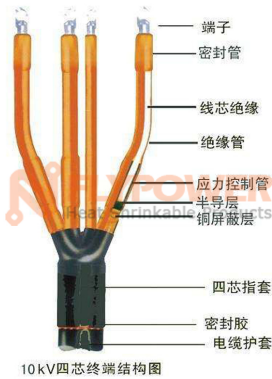

Product Specification

| 电压范围 U0/U (Um) | 芯数 | 电缆截面积/mm ² | 产品型号 | |
|-------------------|---------------|-----------------------|-------------------------------|--------------------------|
| | | | 户内终端 | 户外终端 |
| 18/30kV(36) | 3,1 | 35-50 | 18/30kV BH-HTI-3/1(1/1) | 18/30kV BH-HTO-3/1(1/1) |
| | | 70-120 | 18/30kV BH-HTI-3/2(1/2) | 18/30kV BH-HTO-3/2(1/2) |
| | | 150-240 | 18/30kV BH-HTI-3/3(1/3) | 18/30kV BH-HTO-3/3(1/3) |
| | | 300-400 | 18/30kV BH-HTI-3/4(1/4) | 18/30kV BH-HTO-3/4(1/4) |
| | | 500-630 | 18/30kV BH-HTI-3/5(1/5) | 18/30kV BH-HTO-3/5(1/5) |
| 12/20kV(24) | 3,1 | 35-50 | 12/20kV BH-HTI-3/1(1/1) | 12/20kV BH-HTO-3/1(1/1) |
| | | 70-120 | 12/20kV BH-HTI-3/2(1/2) | 12/20kV BH-HTO-3/2(1/2) |
| | | 150-240 | 12/20kV BH-HTI-3/3(1/3) | 12/20kV BH-HTO-3/3(1/3) |
| | | 300-400 | 12/20kV BH-HTI-3/4(1/4) | 12/20kV BH-HTO-3/4(1/4) |
| | | 500-630 | 12/20kV BH-HTI-3/5(1/5) | 12/20kV BH-HTO-3/5(1/5) |
| 8.7/15kV(17.5) | 3,1 | 25-50 | 8.7/15kV BH-HTI-3/1(1/1) | 8.7/15kV BH-HTO-3/1(1/1) |
| | | 70-120 | 8.7/15kV BH-HTI-3/2(1/2) | 8.7/15kV BH-HTO-3/2(1/2) |
| | | 150-240 | 8.7/15kV BH-HTI-3/3(1/3) | 8.7/15kV BH-HTO-3/3(1/3) |
| | | 300-400 | 8.7/15kV BH-HTI-3/4(1/4) | 8.7/15kV BH-HTO-3/4(1/4) |
| | | 500-630 | 8.7/15kV BH-HTI-3/5(1/5) | 8.7/15kV BH-HTO-3/5(1/5) |
| 6/10kV(12) | 3,1 | 25-50 | 6/10kV BH-HTI-3/1(1/1) | 6/10kV BH-HTO-3/1(1/1) |
| | | 70-120 | 6/10kV BH-HTI-3/2(1/2) | 6/10kV BH-HTO-3/2(1/2) |
| | | 150-240 | 6/10kV BH-HTI-3/3(1/3) | 6/10kV BH-HTO-3/3(1/3) |
| | | 300-400 | 6/10kV BH-HTI-3/4(1/4) | 6/10kV BH-HTO-3/4(1/4) |
| | | 500-630 | 6/10kV BH-HTI-3/5(1/5) | 6/10kV BH-HTO-3/5(1/5) |
| 0.6/1kV(1.2) | 4, 5, 3, 2, 1 | 4-6 | 0.6/1kV BH-HT-4(5,3,2,1)/(-1) | |
| | | 10-16 | 0.6/1kV BH-HT-4(5,3,2,1)/0 | |
| | | 25-50 | 0.6/1kV BH-HT-4(5,3,2,1)/1 | |
| | | 70-120 | 0.6/1kV BH-HT-4(5,3,2,1)/2 | |
| | | 150-240 | 0.6/1kV BH-HT-4(5,3,2,1)/3 | |
| | | 300-400 | 0.6/1kV BH-HT-4(5,3,2,1)/4 | |