


BH-HJK

Heat shrink joint kit 1-36KV

Features/Applications:

BH-HJK heat shrink joint kit is suitable for 1 or 3-core XLPE cable(1-36kV). The joint body is made of advanced liquid silicone rubber with integrated stress control. This design vouches for the best possible interface, thereby greatly minimizing partial discharge and improving its performance during operation. The joint kit includes all the necessary components to make the installation.

- Simple and fast installation;
- Sealing tight, high rebound even after prolonged years of aging and exposure.

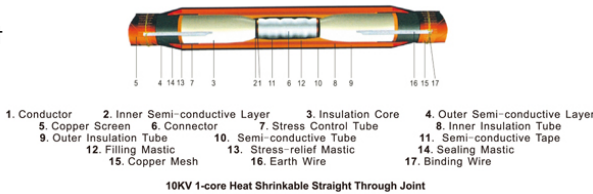

Product Specification

Voltage U0/U (Um)	Cores	Cable Cross Section/mm2	Product No.
18/30kV (36)	1, 3	35-50	18/30kV--BH-HJ-1/1(3/1)
		70-120	18/30kV--BH-HJ-1/2(3/2)
		150-240	18/30kV--BH-HJ-1/3(3/3)
		300-400	18/30kV--BH-HJ-1/4(3/4)
		500-630	18/30kV--BH-HJ-1/5(3/5)
12/20kV (24)	1, 3	35-50	12/20kV--BH-HJ-1/1(3/1)
		70-120	12/20kV--BH-HJ-1/2(3/2)
		150-240	12/20kV--BH-HJ-1/3(3/3)
		300-400	12/20kV--BH-HJ-1/4(3/4)
		500-630	12/20kV--BH-HJ-1/5(3/5)
8.7/15kV(17.5)	1, 3	25-50	8.7/15kV--BH-HJ-1/1(3/1)
		70-120	8.7/15kV--BH-HJ-1/2(3/2)
		150-240	8.7/15kV--BH-HJ-1/3(3/3)
		300-400	8.7/15kV--BH-HJ-1/4(3/4)
		500-630	8.7/15kV--BH-HJ-1/5(3/5)
			6/10kV--BH-HJ-1/4(3/4)
0.6/1kV(1.2)	1, 2,3, 4, 5	4-6	0.6/1kV--BH-HJ-1(2,3,4,5)/-1
		10-16	0.6/1kV--BH-HJ-1(2,3,4,5)/0
		25-50	0.6/1kV--BH-HJ-1(2,3,4,5)/1
		70-120	0.6/1kV--BH-HJ-1(2,3,4,5)/2
		150-240	0.6/1kV--BH-HJ-1(2,3,4,5)/3
		300-400	0.6/1kV--BH-HJ-1(2,3,4,5)/4