


BH-NST

Non slip heat shrink tubing

Features/Applications:

BH-NST Non slip Heat Shrink Tubing) is widely applied in tennis racket, badminton racket, fishing rod, baseball bat, billiard cue, hockey stick, industrial hand tool, athletic equipment and various handles. Increased friction and safety on smooth surfaces minimizes slipping.

- Shrink ratio: 2:1;
- Unique surface designed by environment friendly PE material for durable abrasion.
- Flannel decorative surface provides excellent sweat absorption.
- Avoiding and solving girdle loosen up from handle.
- Innovatory material designed for excellent performance and upgrade product value.
- Economical and easy to install, it's extremely proper to DIY market
- Minimum shrink temperature: 60°C;
- Minimum fully recovery temperature: 105°C
- Color: Red, Green, Yellow, Black, Blue

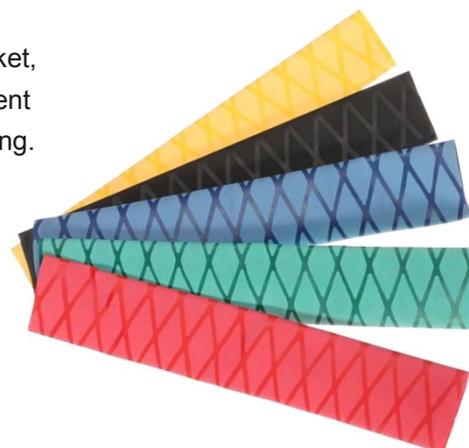

Technical Data

Test item	Value
Operation temperature	-55°C to +110°C
Tensile strength	≥14Mpa
Shrinking temperature	Start at 60°C
Radial shrinking ratio	≥ 50%
Rated volume	600V
Dielectric strength	≥25KV/mm
Volume resistance	10 ¹⁴ Ω.cm
Longitudinal shrinkage	<8%

Product Dimensions (mm)

Model	As supplied (mm)		After recovery (mm)		Packing
	I.D	W.T	I.D	W.T	M/Roll
BH-NST-15	≥15	0.45± 0.15	≤ 8.0	0.85± 0.15	1.0
BH-NST-20	≥20	0.50± 0.15	≤ 11.0	0.90± 0.15	0.8/1.0/1.6
BH-NST-22	≥22	0.50± 0.15	≤ 12.5	0.90± 0.15	0.8/1.0/1.6
BH-NST-25	≥25	0.50± 0.15	≤ 14.5	1.00± 0.15	0.8/1.0/1.6
BH-NST-28	≥28	0.50± 0.15	≤ 15.5	1.00± 0.15	0.8/1.0/1.6
BH-NST-30	≥30	0.60± 0.15	≤ 17.5	1.20± 0.15	0.8/1.0/1.6
BH-NST-35	≥35	0.60± 0.15	≤ 20.0	1.20± 0.15	0.8/1.0/1.6
BH-NST-40	≥40	0.60± 0.15	≤ 23.0	1.20± 0.15	0.8/1.0/1.6
BH-NST-45	≥45	0.65± 0.15	≤ 25.0	1.25± 0.15	0.8/1.0/1.6
BH-NST-50	≥50	0.65± 0.15	≤ 28.0	1.25± 0.15	0.8/1.0